


Battery System

AXE 50.0/60.0H-1HT-S1

- Adopt high -safety LFP battery
- Support 1C continuous charge and discharge
- IP55 design, support whole cabinet transportation
- Easy installation and maintenance
- Support multi-cabinet parallel operation

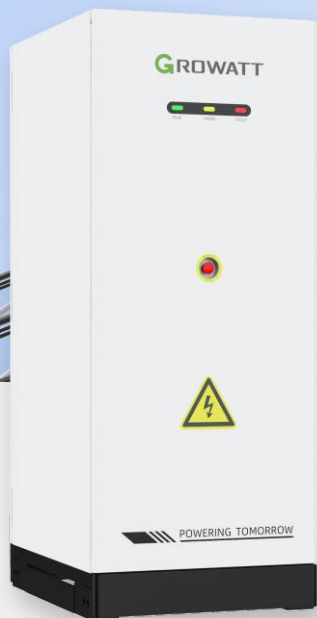

P O W E R
- I N G O
T O M O -
R R O W O

GROWATT

en.growatt.com

Datasheet	AXE 50.0H-1HT-S1	AXE 60.0H-1HT-S1
System Data		
Control module	AXE 1000100-C1	
Number of control module	1	
Battery module	AXE 5.0H-E1 EU	
Battery module energy	5kWh	
Number of modules in series	10	12
Energy capacity	50kWh	60kWh
Usable Capacity	45kWh	54kWh
Rated output power	50kW	60kW
Max. output power*1	50kW	60kW
Dimension (W/H/D)	800/2000/1000mm	
Weight	≤0.9t	≤1t
Nominal voltage	512V	614.4V
Operating voltage range	464~568V	556.8~681.6V
Nominal capacity	100Ah(@25°C)	
Battery type	Cobalt Free Lithium Iron Phosphate (LFP)	
IP Protection	IP55	
Installation	Floor stand	
Operating temperature	-25~55°C	
Relative humidity	5% ~ 95%	
Cooling	Air-Conditioning	
Warranty*2	10 years	
Noise emission	<65dB	
Maximum altitude	≤2000m	
Control Module		AXE 1000100-C1
Dimension (W/H/D)	482/131/580mm	
Weight	≤15kg	
Communication port	CAN/RS485/USB	
Operating voltage range	120V-1000Vdc	
Maximum current	100A	
Monitoring parameters	SOC, System voltage, current, cell voltage, cell temperature, PCBA temperature	
Battery Module		AXE 5.0H-E1 EU
Nominal energy	5.12kWh	
Nominal voltage	51.2V	
Pack operating voltage range	46.4~56.8V	
Battery module dimension (W/H/D)	482.6/131/580mm	
Battery module weight	≤47kg	
UN 38.3, IEC 62619, IEC 60730, IEC 62477, CE, RoHS, UKCA		

* 1 Depend on the max. battery charge/discharge power of the inverter.

* 2 Detailed warranty terms should be negotiated with Growatt in the warranty agreement.

* Nominal charge/discharge current and power derating will occur related to temperature and SOC.

SHENZHEN GROWATT NEW ENERGY CO.,LTD All rights reserved. All specifications are subject to change without notice.