

DEEP BLUE 3.0 Pro

Mono

565W MBB Bifacial Mono PERC
Half-cell Double Glass Module
JAM72D30 540-565/GB Series

Introduction

Assembled with 11BB bifacial PERCUM cells and gapless ribbon connection technology, these double glass modules have the capability of converting the incident light from the rear side together with the front side into electricity, providing higher output power, lower temperature coefficient, less shading loss, as well as enhanced tolerance for mechanical loading.



Higher output power



More reliable, more stable
power generation



Less shading effect




Lower temperature coefficient

Superior Warranty

- 12-year product warranty
- 30-year linear power output warranty

0.45% Annual Degradation
Over 30 years

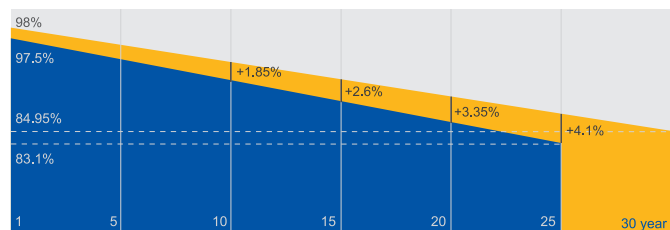

■ Bifacial double glass module linear power warranty

■ Standard module linear power warranty


Comprehensive Certificates

- IEC 61215, IEC 61730, UL 61215, UL 61730
- ISO 9001: 2015 Quality management systems
- ISO 14001: 2015 Environmental management systems
- ISO 45001: 2018 Occupational health and safety management systems
- IEC 62941: 2019 Terrestrial photovoltaic (PV) modules - Quality system for PV module manufacturing



MECHANICAL DIAGRAMS

SPECIFICATIONS

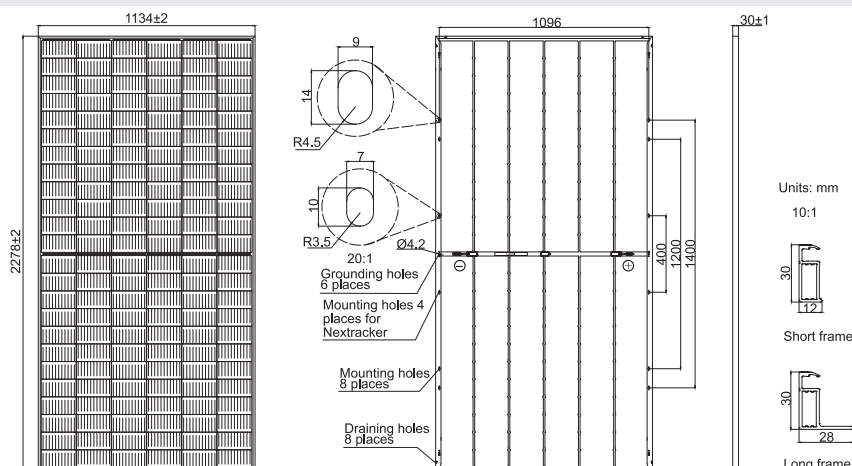

Remark: customized frame color and cable length available upon request

Cell	Mono
Weight	31.8kg
Dimensions	2278±2mm×1134±2mm×30±1mm
Cable Cross Section Size	4mm ² (IEC), 12 AWG(UL)
No. of cells	144(6×24)
Junction Box	IP68, 3 diodes
Connector	QC 4.10-351/ MC4-EVO2A
Cable Length (Including Connector)	Portrait: 200mm(+)/300mm(-); 800mm(+)/800mm(-)(Leapfrog) Landscape: 1300mm(+)/1300mm(-)
Front Glass/Back Glass	2.0mm/2.0mm
Packaging Configuration	36pcs/Pallet 720pcs/40HQ Container

ELECTRICAL PARAMETERS AT STC

TYPE	JAM72D30 -540/GB	JAM72D30 -545/GB	JAM72D30 -550/GB	JAM72D30 -555/GB	JAM72D30 -560/GB	JAM72D30 -565/GB
Rated Maximum Power(P _{max}) [W]	540	545	550	555	560	565
Open Circuit Voltage(V _{oc}) [V]	49.60	49.75	49.90	50.02	50.15	50.28
Maximum Power Voltage(V _{mp}) [V]	41.64	41.80	41.96	42.11	42.27	42.42
Short Circuit Current(I _{sc}) [A]	13.86	13.93	14.00	14.07	14.14	14.21
Maximum Power Current(I _{mp}) [A]	12.97	13.04	13.11	13.18	13.25	13.32
Module Efficiency [%]	20.9	21.1	21.3	21.5	21.7	21.9
Power Tolerance	0~+5W					
Temperature Coefficient of I _{sc} (α _{Isc})	+0.045%/°C					
Temperature Coefficient of V _{oc} (β _{Voc})	-0.275%/°C					
Temperature Coefficient of P _{max} (γ _{Pmp})	-0.350%/°C					
STC	Irradiance 1000W/m ² , cell temperature 25°C, AM1.5G					

Remark: Electrical data in this catalog do not refer to a single module and they are not part of the offer. They only serve for comparison among different module types.

ELECTRICAL CHARACTERISTICS WITH 10% SOLAR IRRADIATION RATIO

OPERATING CONDITIONS


TYPE	JAM72D30 -540/GB	JAM72D30 -545/GB	JAM72D30 -550/GB	JAM72D30 -555/GB	JAM72D30 -560/GB	JAM72D30 -565/GB	Maximum System Voltage	1500V DC
Rated Max Power(Pmax) [W]	578	583	589	594	599	605	Operating Temperature	-40°C~+85°C
Open Circuit Voltage(Voc) [V]	49.93	50.03	50.21	50.31	50.45	50.55	Maximum Series Fuse Rating	30A
Max Power Voltage(Vmp) [V]	41.65	41.78	41.95	42.11	42.26	42.42	Maximum Static Load,Front* Maximum Static Load,Back*	5400Pa(112 lb/ft²) 2400Pa(50 lb/ft²)
Short Circuit Current(Isc) [A]	14.83	14.91	14.98	15.05	15.13	15.20	NOCT	45±2°C
Max Power Current(Imp) [A]	13.88	13.95	14.03	14.10	14.18	14.25	Bifaciality**	70%±10%
Irradiation Ratio(rear/front)							10%	
							Fire Performance	UL Type 29
*For Nextrackerr installations, maximum static load please take compatibility approve letter between JA Solar and Nextrackerr for reference.								

*For NexTracker installations, maximum static load please take compatibility approve letter between JA Solar and NexTracker for reference.


**Bifaciality=P_{max, rear}/Rated P_{max, front}

CHARACTERISTICS

Current-Voltage Curve JAM72D30-555/GB



Power-Voltage Curve JAM72D30-555/GB

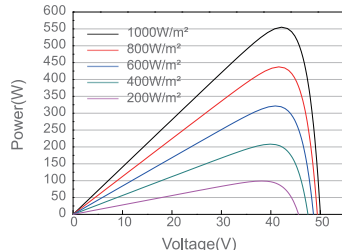

Current-Voltage Curve JAM72D30-555/GB

